

**CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)**

CAH-16 A 16


**Description**

**Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

**Application:** Power distribution lines.

**Material:** Extruded aluminum, Supplied with antioxidant compound INTELTROX.

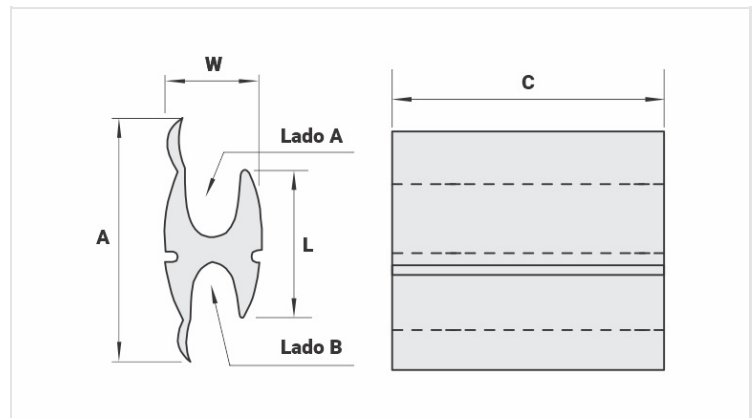

**Datasheet**

**Conductors**

Principal

CA/Cu

fio 10 - 6 AWG | 6 - 16mm<sup>2</sup>

CAA (AWG/MCM)

6

Diâmetro (mm)

2,6 - 5,1

Derivação

CA/Cu

fio 10 - 6 AWG | 6 - 16mm<sup>2</sup>

CAA (AWG/MCM)

6

Diâmetro (mm)

2,6 - 5,1

**Dimensions (mm)**

L

A

C

**Application Tool**

AT-60

Matriz

IW-BG

Compressões

2

AY-96 / CY-96

Matriz

IU-BG

Compressões

2

**Package**

Qtd / Emb

200

Peso Unit. (g)

15,00