

**CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)**

CAH-120 A 120


**Description**

**Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

**Application:** Power distribution lines.

**Material:** Extruded aluminum, Supplied with antioxidant compound INTELTROX.

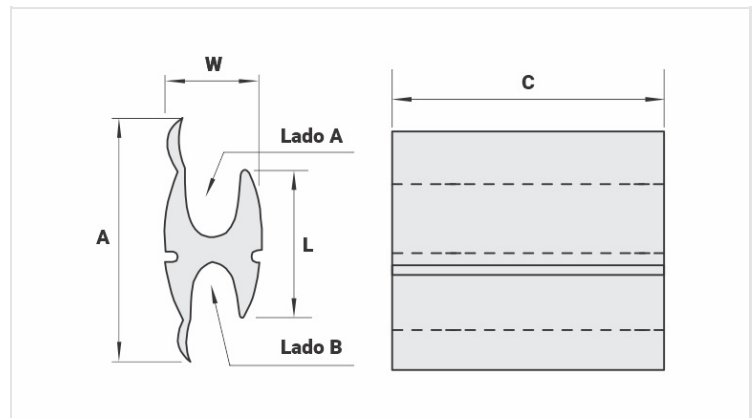

**Datasheet**

**Conductors**

Principal

CA/Cu

1/0 - 4/0 AWG | 50 - 120 mm<sup>2</sup>

CAA (AWG/MCM)

1/0 - 4/0

Diâmetro (mm)

8,9 - 14,3

Derivação

CA/Cu

1/0 - 4/0 | 50 - 120 mm<sup>2</sup>

CAA (AWG/MCM)

1/0 - 4/0

Diâmetro (mm)

8,9 - 14,3

**Dimensions (mm)**

L

A

C

**Application Tool**

AT-60

Matriz

IW-D3

Compressões

6

AY-96 / CY-96

Matriz

IU-D3

Compressões

2

**Package**

