

PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-185

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.

Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.

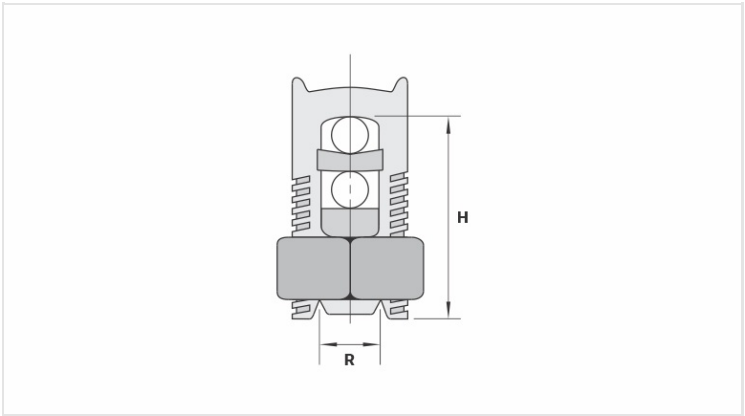

Datasheet

Conductors		
Principal (mm²)		185
Derivação (mm²)		25 - 185
Dimensions (mm)		
L		
A		
C		
D		
E		
Package		
Qtd / Emb		10
Peso Unit. (g)		284,30